

Index to SuperFLO ABS Metric Fittings

Note: CAD drawings & BIM models available for metric system via www.durapipe.co.uk



Pipe (plain)
page 30



Sockets (plain)
page 30



Reducing bushes
(plain)
page 31



Reducing sockets
(plain)
page 31



Elbows 45°
(plain)
page 31



Elbows 90°
(plain)
page 32



Tees 45° (plain)
page 32



Tees 90° (equal)
page 32



Tees 90° (swept plain)
page 33



Tees 90° (reducing
plain)
page 33



Bends 90°
(short radius)
page 33



Bends 90°
(long radius)
page 34



End caps (plain)
page 34



Socket unions (plain)
page 34



Imperial/metric socket
adaptors (plain)
page 35



Male threaded adaptors
(BSP taper male thread)
page 35



Female threaded adaptors
(plain spigot/plain socket/
female BSP thread)
page 35



Hose adaptors
(spigot end/hose tail)
page 36



Female composite unions
(plain/brass,
BSP parallel thread)
page 36



Male composite unions
(plain/brass,
BSP taper thread)
page 36



Female composite unions
(plain/stainless steel,
BSP parallel thread)
page 37



Male composite unions
(plain/stainless steel,
BSP parallel thread)
page 37



Flexible hoses
(plain spigot/BSP thread)
page 38



Wall brackets
(ABS/brass body)
page 38



Flanges stub
(plain serrated)
page 39



Flanges blanking
page 39



Backing rings
(galvanised mild steel)
page 40



Flat gaskets for use with
stub flanges
page 41



Valve support plates
(galvanised mild steel)
page 41



O-Rings
page 41

Valves



VKD Double union ball valves (manual – EPDM seals)
page 42



TKD 3-way ball valves
(manual – EPDM seals)
page 42



VXE Easyfit double union
ball valves (manual –
EPDM seals) page 43



VKR Metering ball valve
(manual – EPDM seals)
page 43



SX Easyfit ball check
valves (EPDM seals)
page 43



SA Easyfit air release
valves (EPDM seals)
page 43



RV Y-Type strainers
(EPDM seals)
page 44



Dialock Diaphragm
valves (manual –
EPDM seals) page 44



Pressure Loading/Relief
valves (EPDM seals)
page 44



FK Butterfly valves
(glass reinforced
polypropylene with ABS disc)
page 45

Accessories



Cobra pipe clips
page 46



Rubber lined pipe clips
page 46



ABS One-step solvent
cement
page 46



Eco-cleaner
page 47



Chamfering and
de-burring tools
page 47




Pipe cutters
page 47



Fibreseal
page 47

SuperFLO ABS Pipe metric system Plain PN10

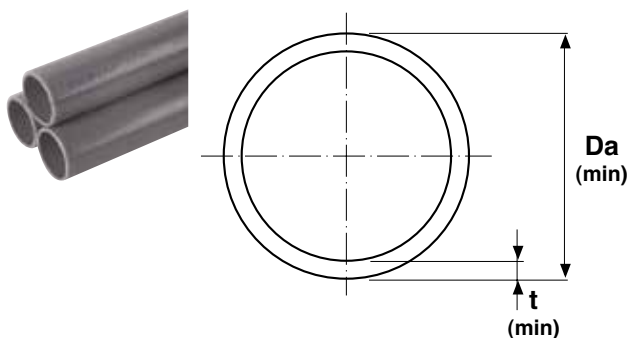


Size	Thickness t mm	Weight kg/m	Length m	Code
Da				
16	1.5	0.07	5	11 555 305
20	1.5	0.10	5	11 555 306
25	1.5	0.14	5	11 555 307
32	1.9	0.21	5	11 555 308
40	2.4	0.33	5	11 555 309
50	3.0	0.52	5	11 555 310
63	3.8	0.81	5	11 555 311
75	4.5	1.14	5	11 555 312
90	5.4	1.65	5	11 555 313
110	6.6	2.45	5	11 555 314
125	7.4	3.13	5	11 555 315
140	8.3	3.97	5	11 555 316
160	9.5	5.13	5	11 555 317
200	11.9	8.06	5	11 555 318
225	13.4	10.17	5	11 555 319
250	14.8	12.31	5	11 555 320
*315	18.7	20.00	5	11 555 323

16	1.5	0.07	6	11 551 305
20	1.5	0.10	6	11 551 306
25	1.5	0.14	6	11 551 307
32	1.9	0.21	6	11 551 308
40	2.4	0.33	6	11 551 309
50	3.0	0.52	6	11 551 310
63	3.8	0.81	6	11 551 311
75	4.5	1.14	6	11 551 312
90	5.4	1.65	6	11 551 313
110	6.6	2.45	6	11 551 314
125	7.4	3.13	6	11 551 315
140	8.3	3.97	6	11 551 316
160	9.5	5.13	6	11 551 317
200	11.9	8.06	6	11 551 318
225	13.4	10.17	6	11 551 319
250	14.8	12.31	6	11 551 320
*315	18.7	20.00	6	11 551 323


*315 is PN8 rated.

Sockets Plain

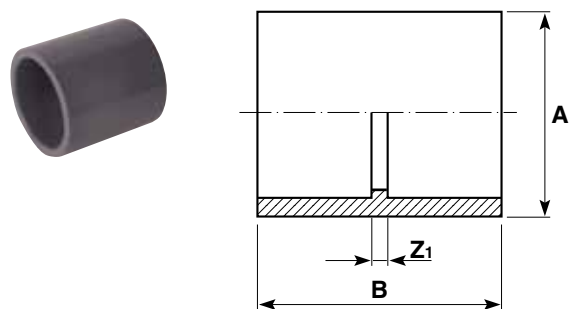

Size	PN	A	B	Z ₁	gms	Code
16	10	21	31	3	5	11 100 305
20	10	25	37	3	7	11 100 306
25	10	31	42	2	12	11 100 307
32	10	41	49	3	25	11 100 308
40	10	50	58	4	45	11 100 309
50	10	62	68	4	77	11 100 310
63	10	78	81	4	154	11 100 311
75	10	88	93	3	230	11 100 312
90	10	107	108	4	380	11 100 313
110	10	126	131	7	690	11 100 314
125	10	146	149	7	1040	11 100 315
140	10	171	163	7	1390	11 100 316
160	10	182	184	8	1660	11 100 317
200	10	223	220	8	2390	11 100 318
225	10	260	250	11	3470	11 100 319
250	10	286	272	10	5760	11 100 320
315	8	355	339	11	9780	11 100 323


Reducing bushes Plain

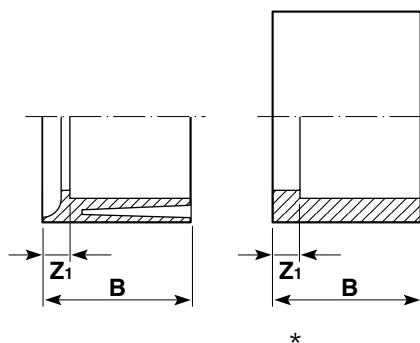

Size	PN	B	Z ₁	gms	Code
20 x 16	10	17	3	2	11 109 412
25 x 20	10	19	3	4	11 109 415
32 x 16	10	23	9	5	11 109 417
32 x 25	10	23	8	6	11 109 419
40 x 32	10	28	6	13	11 109 423
50 x 20*	10	33	17	32	11 109 424
50 x 25*	10	33	13	29	11 109 425
50 x 32*	10	32	11	60	11 109 426
50 x 40	10	32	5	40	11 109 427
63 x 25*	10	39	20	60	11 109 429
63 x 32*	10	39	16	60	11 109 430
63 x 50	10	39	7	70	11 109 432
75 x 63	10	46	7	80	11 109 438
90 x 50*	10	54	23	210	11 109 442
90 x 63*	10	54	15	224	11 109 443
90 x 75	10	55	9	150	11 109 444
110 x 63*	10	64	25	252	11 109 449
110 x 90	10	64	10	270	11 109 451
125 x 110	10	72	9	280	11 109 459
140 x 125	10	79	8	300	11 109 467
160 x 90*	10	89	35	320	11 109 473
160 x 110*	10	89	27	660	11 109 474
160 x 140	10	89	10	700	11 109 476
200 x 160	10	110	21	1560	11 109 487
225 x 160*	10	122	33	1600	11 109 495
225 x 200*	10	122	13	1660	11 109 496
250 x 225*	10	132	12	2230	11 109 499
315 x 250*	8	165	33	4220	11 109 503


*Configuration shown in inset.

Reducing sockets Plain

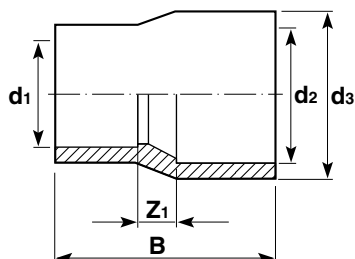


PN	d ₃	d ₂	d ₁	B	Z ₁	gms	Code
10	25	20	16	37	6	6	11 114 412
10	32	25	20	42	6	12	11 114 415
10	40	32	25	50	8	22	11 114 419
10	50	40	32	60	11	39	11 114 423
10	63	50	40	71	11	80	11 114 427
10	75	63	50	85	14	108	11 114 432
10	90	75	63	98	13	190	11 114 438
10	110	90	75	115	16	350	11 114 444
10	125	110	90	140	21	480	11 114 451
10	140	125	110	156	20	690	11 114 459
10	160	140	125	170	20	1000	11 114 467
10	200	160	140	193	23	2180	11 114 476
10	225	200	160	237	41	2530	11 114 487

Elbows 45° Plain




Size	PN	A	C	Z ₁	gms	Code
16	10	21	20	5	5	11 119 305
20	10	25	22	5	7	11 119 306
25	10	31	26	7	14	11 119 307
32	10	40	31	8	27	11 119 308
40	10	50	37	10	54	11 119 309
50	10	62	45	13	100	11 119 310
63	10	82	54	16	180	11 119 311
75	10	90	63	17	300	11 119 312
90	10	112	70	18	550	11 119 313
110	10	137	90	27	950	11 119 314
125	10	155	103	31	1350	11 119 315
140	10	173	115	37	1980	11 119 316
160	10	190	125	35	2920	11 119 317
200	10	235	149	43	3460	11 119 318
225	10	262	167	46	4920	11 119 319
250	10	286	189	58	5900	11 119 320
315	8	359	230	66	11880	11 119 323

Elbows 90° Plain




Size	PN	A	C	Z ₁	gms	Code
16	10	20	24	10	6	11 115 305
20	10	25	28	11	10	11 115 306
25	10	31	34	15	17	11 115 307
32	10	40	41	18	35	11 115 308
40	10	50	47	20	68	11 115 309
50	10	62	59	26	129	11 115 310
63	10	78	71	31	230	11 115 311
75	10	90	83	38	385	11 115 312
90	10	112	100	49	690	11 115 313
110	10	136	125	63	1220	11 115 314
125	10	155	140	63	1720	11 115 315
140	10	173	153	76	2390	11 115 316
160	10	190	172	79	3600	11 115 317
200	10	235	207	110	4300	11 115 318
225	10	261	240	119	6550	11 115 319
250	10	286	319	188	9560	11 115 320
315	8	359	400	236	17910	11 115 323

Tees 45° Plain

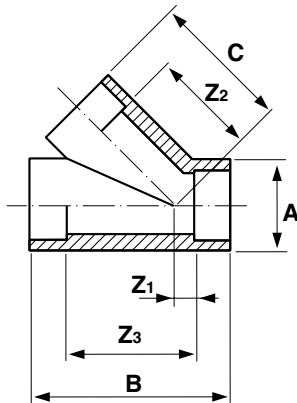


Size	PN	A	B	C	Z ₁	Z ₂	Z ₃	gms	Code
20	10	28	68	43	6	26	34	30	11 418 306
25	10	33	81	52	7	29	55	45	11 418 307
32	10	41	98	65	9	42	52	80	11 418 308
40	10	50	117	77	11	51	65	135	11 418 309
50	10	60	140	95	12	63	78	195	11 418 310
63	10	74	169	114	13	76	93	410	11 418 311

Tees 90° Equal




Size	PN	A	B	C	Z ₁	gms	Code
16	10	21	47	25	10	7	11 122 305
20	10	25	57	30	12	12	11 122 306
25	10	31	67	34	15	24	11 122 307
32	10	40	81	43	18	48	11 122 308
40	10	50	99	50	23	87	11 122 309
50	10	62	119	62	28	160	11 122 310
63	10	78	146	70	34	300	11 122 311
75	10	90	172	87	36	510	11 122 312
90	10	112	205	104	46	900	11 122 313
110	10	132	248	128	60	1650	11 122 314
125	10	154	276	143	67	2300	11 122 315
140	10	172	307	153	72	3200	11 122 316
160	10	191	343	172	86	4800	11 122 317
200	10	237	413	206	101	5800	11 122 318
225	10	262	482	240	120	7700	11 122 319
250	10	286	518	259	128	10160	11 122 320
315	8	360	652	326	162	19390	11 122 323

Tees 90° Swept plain

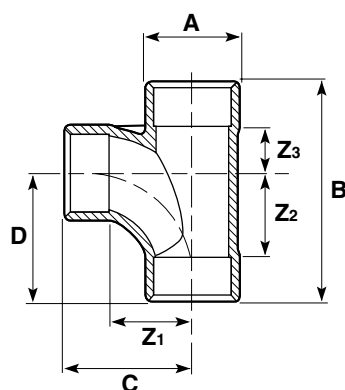


Size	PN	A	B	C	D	Z ₁	Z ₂	Z ₃	gms	Code
32	10	41	115	79	79	57	57	14	90	11 148 308
50	10	62	160	105	105	74	74	24	259	11 148 310
63	10	78	195	125	125	87	87	32	480	11 148 311
75	10	92	210	125	125	81	81	41	601	01 148 108
110	10	139	315	190	190	127	127	62	2235	11 148 314

Tees 90° Reducing plain

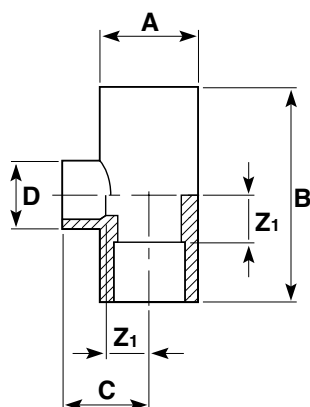


Size	PN	A	B	C	D	Z ₁	gms	Code
25 x 20	10	31	67	31	25	14	22	11 124 415
32 x 20	10	40	81	35	25	18	40	11 124 418
32 x 25	10	40	81	37	31	18	41	11 124 419
40 x 20	10	50	98	39	25	22	72	11 124 421
40 x 25	10	50	98	41	31	22	72	11 124 422
50 x 20	10	62	119	44	29	27	104	11 124 424
50 x 25	10	62	119	46	31	27	140	11 124 425
50 x 32	10	62	119	50	40	27	140	11 124 426
63 x 25	10	78	146	53	31	34	250	11 124 429
63 x 32	10	78	146	57	40	34	250	11 124 430
75 x 32	10	91	168	62	41	40	391	11 124 435
75 x 40	10	91	168	66	50	40	398	11 124 436
75 x 50	10	91	168	71	61	40	406	11 124 437
75 x 63	10	91	168	78	76	40	428	11 124 438
90 x 40	10	109	198	74	50	48	642	11 124 441
90 x 50	10	109	198	79	61	48	649	11 124 442
90 x 63	10	109	198	86	76	48	664	11 124 443
90 x 75	10	109	198	92	91	48	693	11 124 444
110 x 50	10	133	244	92	61	61	1165	11 124 448
110 x 63	10	133	244	99	76	61	1173	11 124 449
110 x 75	10	133	244	105	91	61	1188	11 124 450
110 x 90	10	133	244	112	109	61	1210	11 124 451

Bends 90° Short radius




Size	PN	A	C	Z ₁	gms	Code
20	10	26	57	40	18	11 118 306
25	10	33	69	50	38	11 118 307
32	10	41	87	64	75	11 118 308
40	10	51	107	80	135	11 118 309
50	10	62	132	100	245	11 118 310
63	10	78	165	126	470	11 118 311
75	10	93	195	150	810	11 118 312
90	10	111	234	180	1350	11 118 313
110	10	140	284	220	2570	11 118 314

Bends 90° Long radius

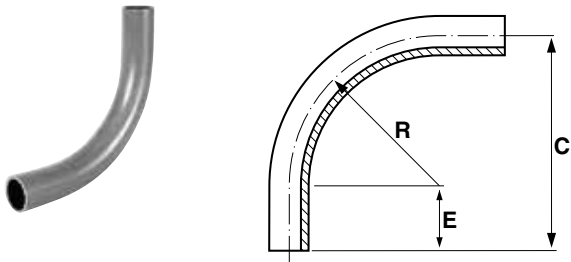


Size	C	E	R	gms	Code
125	750	250	500	4790	11 309 315
140	840	280	560	6700	11 309 316
160	960	320	640	10040	11 309 317
200	1200	400	800	19480	11 309 318
225	1350	450	900	27850	11 309 319

End caps Plain

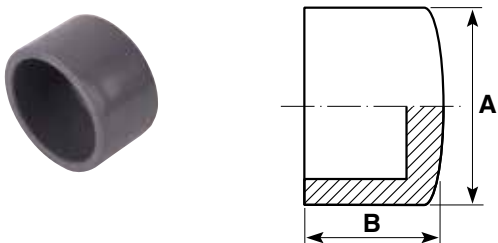

Size	PN	A	B	Weight gms	Code
16	10	21	16	3	11 149 305
20	10	25	21	5	11 149 306
25	10	31	24	8	11 149 307
32	10	41	30	19	11 149 308
40	10	50	35	30	11 149 309
50	10	62	41	53	11 149 310
63	10	78	50	106	11 149 311
75	10	94	59	180	11 149 312
90	10	112	70	300	11 149 313
110	10	136	84	570	11 149 314

Socket unions Plain

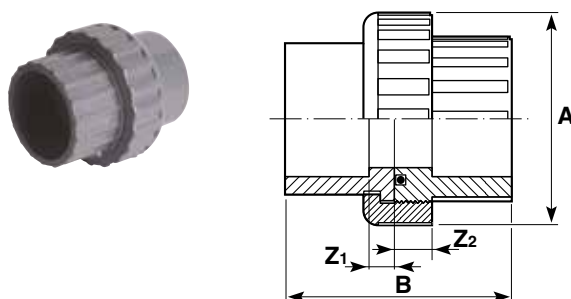


Size	PN	A	B	Z ₁	Z ₂	Weight gms	Code
16	10	34	42	3	10	19	11 205 305
20	10	40	47	3	10	29	11 205 306
25	10	50	53	3	10	46	11 205 307
32	10	57	64	8	11	70	11 205 308
40	10	73	78	10	13	140	11 205 309
50	10	80	92	13	15	154	11 205 310
63	10	102	111	14	20	270	11 205 311
75	10	135	107	8	13	720	11 205 312
90	10	157	115	7	4	750	11 205 313
110	10	183	138	8	7	1115	11 205 314

EPDM seal as standard.

For FPM seal order 11 204 3**


Imperial/metric socket adaptors Plain

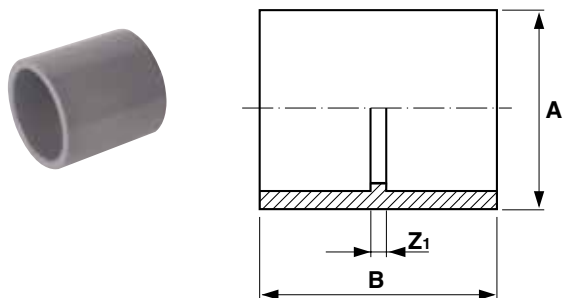

Size	PN	A	B	Z ₁	Weight gms	Code
*1/2 - 20	10	26	37	3	11	11 345 102
*3/4 - 25	10	31	41	3	23	11 345 103
*1 - 32	10	40	49	3	40	11 345 104
*1 1/4 - 40	10	50	58	2	80	11 345 105
*1 1/2 - 50	10	59	67	3	160	11 345 106
*2 - 63	10	74	78	2	230	11 345 107
*3 - 90	10	107	105	3	340	11 345 109
*4 - 110	10	134	130	6	675	11 345 110
*6 - 160	10	195	183	8	1890	11 345 112

*Sizes shown in imperial n.b. designation.


Male threaded adaptors BSP taper male thread

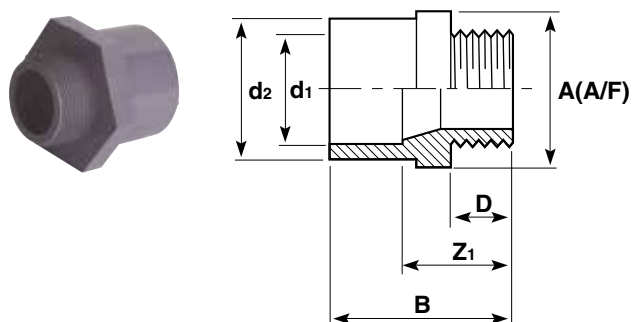

Size d ₂ d ₁	PN	T*	A	B	D	Z ₁	Weight gms	Code
16- 12-	10	3/8	19	35	11	22	7	11 151 331
20- 16-	10	3/8	24	38	12	24	7	11 151 332
20- 16-	10	1/2	24	42	15	28	7	11 151 333
20- 16-	10	3/4	30	46	16	28	8	11 151 327
25- 20-	10	1/2	30	46	15	28	13	11 151 334
25- 20-	10	3/4	30	48	16	31	14	11 151 335
32- 25-	10	1/2	36	51	15	32	23	11 151 352
32- 25-	10	3/4	36	52	16	33	23	11 151 336
32- 25-	10	1	36	55	19	36	23	11 151 337
40- 32-	10	1	46	58	20	36	36	11 151 338
40- 32-	10	1 1/4	46	60	21	37	38	11 151 339
50- 40-	10	1 1/4	55	66	22	39	70	11 151 340
50- 40-	10	1 1/2	55	66	21	39	70	11 151 341
63- 50-	10	1 1/2	72	73	22	41	115	11 151 342
63- 50-	10	2	72	78	26	46	123	11 151 343
75- 63-	10	2	80	84	26	46	150	11 151 345

*Thread size designation.


Female threaded adaptors Plain spigot/plain socket/female BSP thread

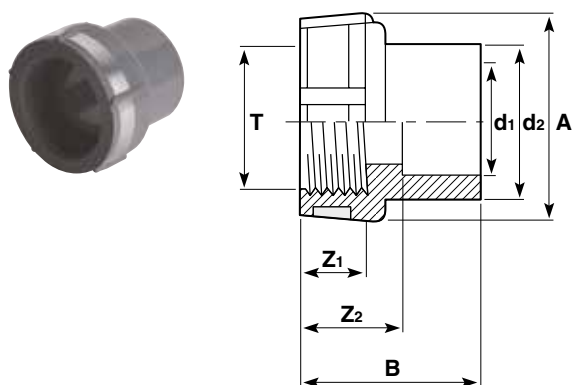

Size		Weight							
d ₂	d ₁	PN	T*	A	B	Z ₁	Z ₂	gms	Code
16-	12-	10	3/8	24	28	11	16	7	11 153 331
20-	16-	10	1/2	30	35	15	21	14	11 153 333
25-	20-	10	3/4	38	39	16	22	21	11 153 335
32-	25-	10	1	45	45	18	26	42	11 153 337
40-	32-	10	1 1/4	56	54	21	31	69	11 153 339
50-	40-	10	1 1/2	64	60	21	33	108	11 153 341
63-	50-	10	2	78	72	25	41	169	11 153 343


*Thread size designation.

Hose adaptors Spigot end/hose tail

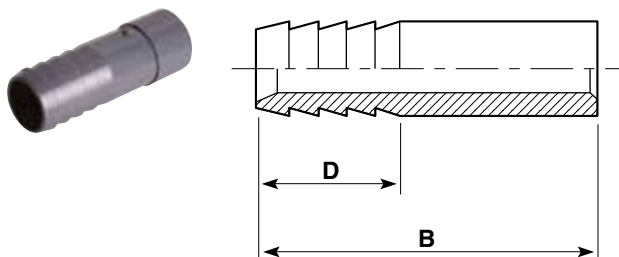

Size	PN	B	D	Weight gms	Code
16	10	60	25	8	11 158 305
20	10	75	30	13	11 158 306
25	10	80	35	20	11 158 307
32	10	90	40	32	11 158 308

Female composite unions Plain/brass, female BSP parallel thread

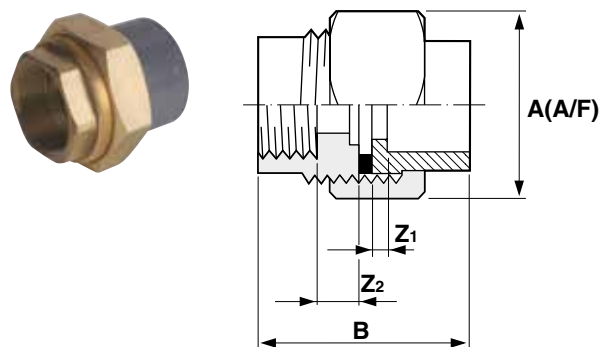

Size	PN	A	B	Z ₁	Z ₂	Weight gms	Code
16 x 3/8*	10	32	37	3	7	105	11 216 305
20 x 1/2*	10	40	43	3	7	175	11 216 306
25 x 3/4*	10	48	47	3	7	320	11 216 307
32 x 1*	10	55	59	8	9	420	11 216 308
40 x 1 1/4*	10	65	68	10	8	620	11 216 309
50 x 1 1/2*	10	78	76	12	9	1000	11 216 310
63 x 2*	10	88	89	12	11	1200	11 216 311


*Thread sizes designation.

Fitted with brass retaining nut and EPDM rubber seal.

Brass material to BS2872, WRAS approved.

ALL Durapipe Brass Components are manufactured using DZR Brass.

Male composite unions Plain/brass, male BSP taper thread

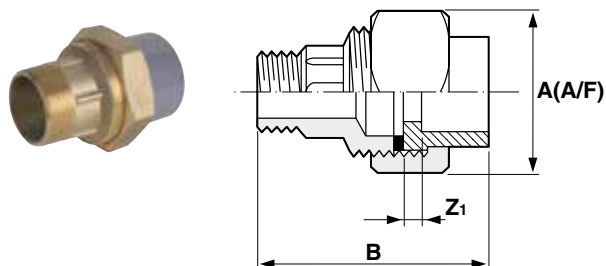

Size	PN	A	B	Z ₁	Z ₂	Weight gms	Code
16 x 3/8*	10	32	48	3	9	100	11 217 305
20 x 1/2*	10	40	54	3	9	165	11 217 306
25 x 3/4*	10	48	74	3	10	250	11 217 307
32 x 1*	10	55	86	8	11	310	11 217 308
40 x 1 1/4*	10	65	94	10	11	450	11 217 309
50 x 1 1/2*	10	78	108	12	12	800	11 217 310
63 x 2*	10	88	126	12	14	950	11 217 311


*Thread sizes designation.

Fitted with brass retaining nut and EPDM rubber seal.

Brass material to BS2872, WRAS approved.

ALL Durapipe Brass Components are manufactured using DZR Brass.

Female composite unions Plain/stainless steel, female BSP parallel thread

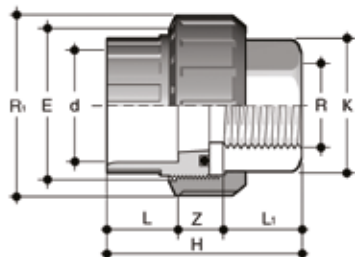


Size	PN	E	H	K	Z	Weight gms	Code
16mm x 3/8"*	10	33	45.5	20	18	50	11 218 305
20mm x 1/2"*	10	41	48.5	25	16	81	11 218 306
25mm x 3/4"*	10	50	54.5	32	17	152	11 218 307
32mm x 1"*	10	58	59.5	38	18	170	11 218 308
40mm x 1 1/4"*	10	72	68.5	48	21	353	11 218 309
50mm x 1 1/2"*	10	79	84.5	55	30.5	435	11 218 310
63mm x 2"*	10	98	94.5	69	29.5	779	11 218 311

*Thread sizes designation.

ALL Durapipe Stainless Steel Components are manufactured using 316L Grade Stainless Steel.

Male composite unions Plain/stainless steel, male BSP parallel thread

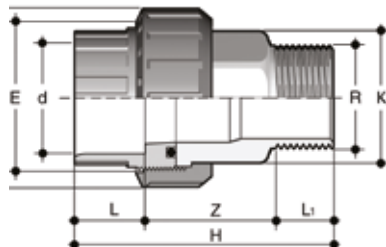

Size	PN	E	H	K	Z	Weight gms	Code
16 x 3/8"*	10	33	58.5	20	34	74	11 219 305
20 x 1/2"*	10	41	65	25	35.5	123	11 219 306
25 x 3/4"*	10	50	72.5	32	38.5	215	11 219 307
32 x 1"*	10	58	80	38	40.5	269	11 219 308
40 x 1 1/4"*	10	72	91	48	45.5	516	11 219 309
50 x 1 1/2"*	10	79	101	55	50.5	639	11 219 310
63 x 2"*	10	98	122.5	69	60.5	1111	11 219 311

*Thread sizes designation.

ALL Durapipe Stainless Steel Components are manufactured using 316L Grade Stainless Steel.

Flexible hoses Plain spigot, BSP thread



Size	Code
20 x 1/2" x 300	11450306
25 x 3/4" x 300	11450307
32 x 1" x 300	11450308
20 x 1/2" x 600	11451306
25 x 3/4" x 600	11451307
32 x 1" x 600	11451308


10 bar working pressure at 20 °C.

Other lengths available on request.

ALL Durapipe Brass Components are manufactured using DZR Brass.

Product is approved to BSRIA BG4-2004

Wall brackets ABS/brass body

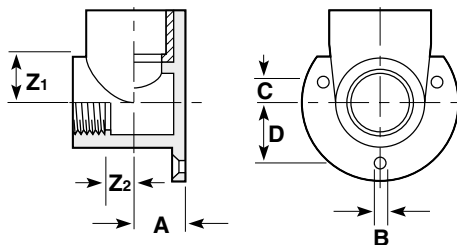


Size	PN	A	B	C	D	Z ₁	Z ₂	Weight gms	Code
16- 3/8"	10	15	4.5	6	19	17	9	180	31 422 326
20- 1/2"	10	16.5	4.5	6	19	18	9	185	31 422 327
25- 1/2"	10	20	4.5	5	24	19	11	215	31 422 328
25- 3/4"	10	20	4.5	5	24	19	11	200	31 422 329

*Thread sizes designation.

ALL Durapipe Brass Components are manufactured using DZR Brass.


Flanges stub Plain serrated

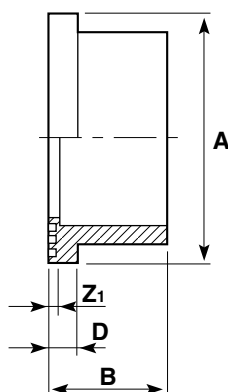

Size	PN	A	B	D	Z ₁	Weight gms	Code
16	10	29	17	6	3	5	11 135 305
20	10	34	20	6	3	8	11 135 306
25	10	41	22	7	3	13	11 135 307
32	10	50	26	7	3	19	11 135 308
40	10	61	30	8	3	36	11 135 309
50	10	73	35	8	3	60	11 135 310
63	10	90	42	9	4	100	11 135 311
75	10	106	49	10	4	150	11 135 312
90	10	125	59	11	6	240	11 135 313
110	10	149	68	12	6	370	11 135 314
125	10	165	76	13	5	520	11 135 315
140	10	180	83	14	7	680	11 135 316
160	10	205	93	16	5	930	11 135 317
200*	10	252	114	17	6	1300	11 135 318
225	10	273	126	24	6	1470	11 135 319
250	10	306	140	20	9	2140	11 135 320
315	10	375	180	32	14	5000	11 135 323

*The 200mm (NW175) stub flange supplied by Durapipe when used in conjunction with backing ring; code number 421 318 and 420 318 has a bolt circle diameter which matches 225mm (NW200) flanges (295mm PCD).

Flanges blanking

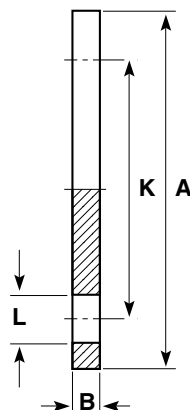


DIN 2501 16 bar/PN16

Size	PN	A	B	K	L	No. Holes	Weight gms	Code
32	10	116	13	85	14	4	139	11 323 308
40	10	141	13	100	18	4	204	11 323 309
50	10	153	13	110	18.5	4	237	11 323 310
63	10	166	19	124	18	4	447	11 323 311
75	10	186	19	145	18.5	4	568	11 323 312
90	10	201	19	159	18	8	645	11 323 313
110	10	221	26	180	18	8	715	11 323 314
125	10	251	26	210	18	8	1338	11 323 315
140	10	251	26	210	18	8	1338	11 323 316
160	10	286	27	240	23	8	1720	11 323 317

Note: Durapipe backing rings must be used in conjunction with blank flanges.

Backing rings Galvanised mild steel

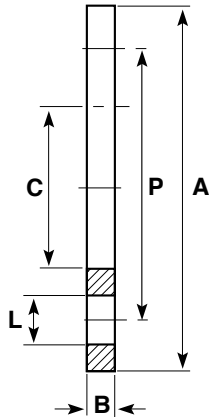

Drilled to DIN 2501 (BS4504) PN10/PN16

Size	A	B	C	P	L	No. Holes	Weight gms	Code
16	90	7	23	61	14	4	240	13 421 305
20	96	6	28	65	14	4	300	13 421 306
25	106	7	34	75	14	4	320	13 421 307
32	116	7	42	85	14	4	350	13 421 308
40	142	7	51	100	18	4	420	13 421 309
50	152	7	62	110	18	4	710	13 421 310
63	165	8	78	125	18	4	1010	13 421 311
75	186	9	92	145	18	4	1280	13 421 312
90	201	9	110	160	18	8	1380	13 421 313
110	220	9	133	180	18	8	1430	13 421 314
125	253	8	150	210	18	8	1960	13 421 315
140	251	11	167	210	18	8	2060	13 421 316
160	286	11	190	240	22	8	2700	13 421 317

Drilled to DIN 2501 (BS4504) PN10

Size	A	B	C	P	L	No. Holes	Weight gms	Code
200*	340	11	235	295	22	8	3190	13 421 318
225	340	11	249	295	22	8	3540	13 421 319
250	396	20	278	350	22	12	7330	13 421 320
315	448	20	355	402	22	12	9900	13 421 323

Drilled to DIN 2501 (BS4504) PN16


Size	A	B	C	P	L	No. Holes	Weight gms	Code
200*	340	11	235	295	22	12	3190	13 420 318
225	340	11	249	295	22	12	3540	13 420 319
250	405	20	278	355	26	12	7330	13 420 320
315	460	20	355	410	26	12	9900	13 420 323

Drilled to ANSI CLASS 150

Size	A	B	C	P	L	No. Holes	Weight gms	Code
20	90	8	28	61	16	4	300	13 448 306
25	100	8	34	70	16	4	380	13 448 307
32	110	9	42	79	16	4	480	13 448 308
40	118	8	51	90	16	4	530	13 448 309
50	129	8	63	99	16	4	590	13 448 310
63	154	10	78	121	19	4	1050	13 448 311
90	192	11	110	153	19	4	1470	13 448 313
110	230	11	133	190	19	8	2080	13 448 314


*The 200mm (NW175) stub flange supplied by Durapipe when used in conjunction with backing ring; code number 421 318 and 420 318 has a bolt circle diameter which matches 225mm (NW200) flanges (295mm PCD).

Flat gaskets for use with stub flanges



Size	A	B	Weight gms	EPDM Code
16	29	3.0	2	13 411 305
20	34	3.5	2	13 411 306
25	41	3.5	3	13 411 307
32	50	3.0	4	13 411 308
40	60	3.0	4	13 411 309
50	72	3.3	5	13 411 310
63	90	4.0	10	13 411 311
75	106	3.0	20	13 411 312
90	125	3.1	30	13 411 313
110	150	4.0	40	13 411 314
125	166	4.0	50	13 411 315
140	180	4.0	60	13 411 316
160	205	4.0	70	13 411 317
200	253	4.0	120	13 411 318
225	274	3.8	165	13 411 319
250	306	4.0	170	13 431 320
280	330	4.0	190	13 411 321
315	379	4.2	220	13 411 323

Valve support plates Galvanised steel

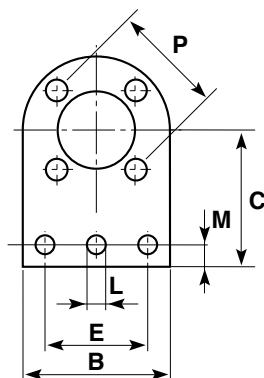


DIN 2501 16 bar/PN16

Size	B	C	E	L	M	N	P	No. Holes	Weight gms	Code
16	91	84	50	14	16	2	61	4	370	31 459 305
20	97	86	49	14	16	2	65	4	640	31 459 306
25	105	89	76	14	16	2	75	4	750	31 459 307
32	114	96	77	14	12	2	85	4	860	31 459 308
50	150	125	100	14	22	2	110	4	1480	31 459 310
63	160	134	100	14	24	2	125	4	2100	31 459 311
75	185	144	125	14	22	2	145	4	2500	31 459 312
90	203	150	127	14	23	2	160	8	2660	31 459 313
110	214	160	150	14	22	3	179	8	2960	31 459 314

N = No. of holes in base.

O-Rings EPDM/FPM




Size	ID	B	Weight gms	EPDM Code	FPM Code
16	15.54	2.62	23	13 209 305	03 211 305
20	20.22	3.53	39	13 209 306	03 211 306
25	28.17	3.53	68	13 209 307	03 211 307
32	32.93	3.53	94	13 209 308	03 211 308
40	40.65	5.34	163	13 209 309	03 211 105
50	47.00	5.34	190	13 209 310	03 211 106
63	59.69	5.34	355	03 306 107	03 211 107

Valves

**Premium Quality
Valve for Demanding
Environments**

VKD Double union ball valves Manual – EPDM seals




d	DN	PN	L	Z	H	E	B	C	Weight gms	Code
16	10	16	14	75	103	55	49	66	160	HO DKA 305
20	15	16	16	71	103	55	49	66	160	HO DKA 306
25	20	16	19	77	115	66	59	75	265	HO DKA 307
32	25	16	22	84	128	75	66	85	345	HO DKA 308
40	32	16	26	94	146	87	75	97	550	HO DKA 309
50	40	16	31	102	164	100	87	110	730	HO DKA 310
63	50	16	38	123	199	122	101	134	1280	HO DKA 311

Options:

FPM seals (plain ends) order HO DKB ***

For threaded versions refer to Imperial Valves section.

Manual valves can be supplied with locking kits - further information is available from our Valve Department.





d	DN	PN	Z	L	H	H ₁	E	B	B ₁	C	C ₁	gms	Code
75	65	16	147	44	235	133	164	164	87	225	175	3725	HO DKA 312
90	80	16	168	51	270	149	203	177	105	327	272	5700	HO DKA 313
110	100	16	186	61	308	167	238	195	129	385	330	8660	HO DKA 314

Options:

FPM seals (plain ends) order HO DKB***

**Premium Quality
Valve for Demanding
Environments**

TKD 3-way ball valves Manual – EPDM seals



T-Port configuration

d	DN	PN	H	Z	C	C ₁	B	B ₁	gms	Code
20	15	16	118	86	67	40	54	29	235	HO TTA 306
25	20	16	145	107	85	49	65	34.5	415	HO TTA 307
32	25	16	160	116	85	49	65.9	39	570	HO TTA 308
40	32	16	188.5	136.5	108	64	82.5	46	875	HO TTA 309
50	40	16	219	157	108	64	89	52	1250	HO TTA 310
63	50	16	266.5	190.5	134	76	108	62	2225	HO TTA 311

Options:

FPM seals (plain ends) order HO TTB***

FPM seals (threaded ends) order HO TTB***

Manual valves can be supplied with locking kits - further information is available from our Valve Department.


L-Port configuration

d	DN	PN	H	Z	C	C ₁	B	B ₁	gms	Code
20	15	16	118	86	67	40	54	29	235	HO LTA 306
25	20	16	145	107	85	49	65	34.5	415	HO LTA 307
32	25	16	160	116	85	49	65.9	39	570	HO LTA 308
40	32	16	188.5	136.5	108	64	82.5	46	875	HO LTA 309
50	40	16	219	157	108	64	89	52	1250	HO LTA 310
63	50	16	266.5	190.5	134	76	108	62	2225	HO LTA 311

Options:

FPM seals (plain ends) order HO LTB***

VXE Easyfit double union ball valves Manual – EPDM seals

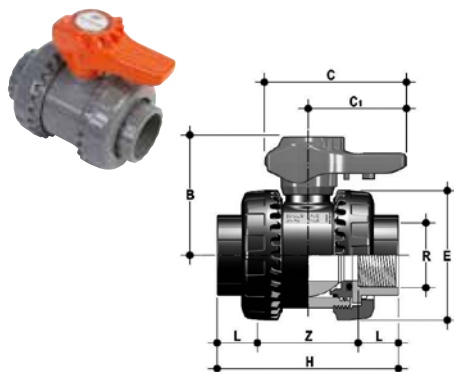


d	DN	PN	L	Z	H	E	B	C	C ₁	gms	Code
16	10	16	14	54	82	54	49	64	20	175	HO XEA 305
20	15	16	16.5	49	82	54	49	64	20	175	HO XEA 306
25	20	16	19	53	91	63	62	78	23	252	HO XEA 307
32	25	16	22.5	58	103	72	71	87	27	354	HO XEA 308
40	32	16	26	68	120	85	82	102	30	548	HO XEA 309
50	40	16	30	79	139	100	92	109	33	771	HO XEA 310
63	50	16	36	102	174	118	110	133	39	1285	HO XEA 311

Options:

FPM seals (plain ends) order HO XEB ***
For threaded versions refer to Imperial Valves section.



VKR Metering ball valves Manual – EPDM seals

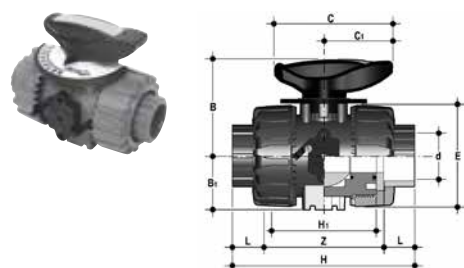


d	DN	PN	L	Z	H	H ₁	E	B	B ₁	C	C ₁	gms	Code
16	10	16	16	71	103	65	54	54	29	67	40	215	HO MBA 305
20	15	16	16	71	103	65	54	54	29	67	40	215	HO MBA 306
25	20	16	19	77	115	70	65	65	34.5	85	49	330	HO MBA 307
32	25	16	22	84	128	78	73	70	39	85	49	438	HO MBA 308
40	32	16	26	94	146	88	86	83	46	108	64	493	HO MBA 309
50	40	16	31	102	164	91	98	89	52	108	64	925	HO MBA 310
63	50	16	38	123	199	111	122	108	62	134	76	1577	HO MBA 311

Options:

FPM seals (plain ends) order HO MBB ***

SX Easyfit ball check valves EPDM seals

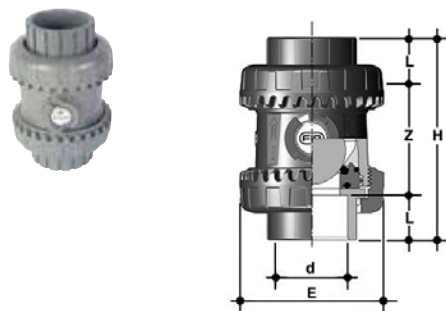


d	DN	PN	L	Z	H	E	gms	Code
16	10	16	14	54	82	54	145	HO SXA 305
20	15	16	16.5	50	82	54	148	HO SXA 306
25	20	16	19	53	91	63	190	HO SXA 307
32	25	16	22.5	59	103	72	300	HO SXA 308
40	32	16	26	68	120	85	460	HO SXA 309
50	40	16	30	77	139	100	675	HO SXA 310
63	50	16	36	98	174	118	1080	HO SXA 311

Options:

FPM seals (plain ends) order HO SXB***
For threaded versions refer to Imperial Valves section.

Note: this valve must be installed at a minimum distance of 10 x nominal diameter (eg. 20" for size 63mm) from pump flange.

SA Easyfit air release valves EPDM seals

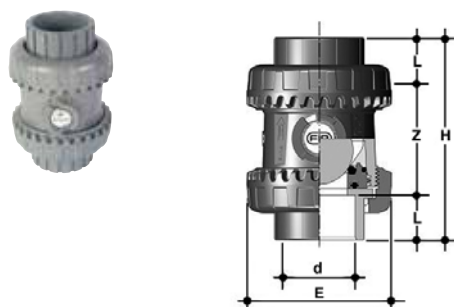


d	DN	PN	L	Z	H	E	gms	Code
20	15	16	16.5	50	82	54	148	HO SAA 306
25	20	16	19	53	91	63	190	HO SAA 307
32	25	16	22.5	59	103	72	300	HO SAA 308
40	32	16	26	68	120	85	460	HO SAA 309
50	40	16	30	77	139	100	675	HO SAA 310
63	50	16	36	98	174	118	1080	HO SAA 311

Options:

FPM seals (plain ends) order HO SAB***
For threaded versions refer to Imperial Valves section.

RV Y-Type strainers Plain ends – EPDM seals




D	DN	PN	A	B	E	L	Z	H	Fig.	gms	Code
20	15	16	125	72	55	16	103	135	A	211	H0 UVA 306
25	20	16	145	84	66	19	120	158	A	358	H0 UVA 307
32	25	16	165	95	75	22	132	176	A	526	H0 UVA 308
40	32	16	190	111	87	26	155	207	A	733	H0 UVA 309
50	40	16	210	120	100	31	181	243	A	1095	H0 UVA 310
63	50	10	240	139	120	38	222	298	A	1843	H0 UVA 311

Options:

FPM seals (plain ends) order H0 UVB ***

For threaded versions refer to Imperial Valves section.

Dialock® diaphragm valves Manual – plain union ends – EPDM seals

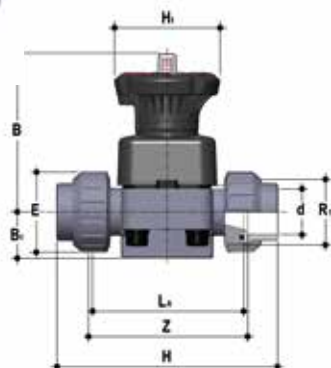

d	DN	PN	B	B ₁	E	H	H ₁	L _A	Z	gms	Code
20	15	10	102	25	41	143	80	90	98	420	H0 DVA 306
25	20	10	105	30	50	167	80	108	115	473	H0 DVA 307
32	25	10	114	33	58	180	80	116	122	665	H0 DVA 308
40	32	10	119	30	72	208	80	134	144	770	H0 DVA 309
50	40	10	147	35	79	234	120	154	164	1460	H0 DVA 310
63	50	10	172	46	98	272	120	184	195	2340	H0 DVA 311


Options:

FPM diaphragm order H0 DVB***

PTFE diaphragm order H0 DVC***

Travel stop and stroke limiter options available upon request.

LR Pressure loading/relief valves EPDM seals

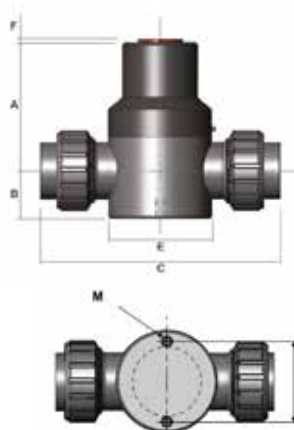

Size	DN	PN	A	B	C	D	E	F	M	gms	Code
16	10	10	85	26	133	40	52	3	M5	101	H0 LRA 305
20	15	10	85	26	133	40	52	3	M5	101	H0 LRA 306
25	20	10	102	33	153	50	64	3	M5	257	H0 LRA 307
32	25	10	105	35	174	60	79	3	M6	425	H0 LRA 308
40	30	10	113	42	204	70	89	3	M6	607	H0 LRA 309
50	40	10	137	46	233	80	109	6	M6	1005	H0 LRA 310
63	50	10	153	57	291	100	126	6	M6	1444	H0 LRA 311


*Max (3 Bar loading) (10 Bar relief)

Options:

FPM options order H0 LRB***

PTFE options order H0 LRC***

FK Butterfly valves Glass reinforced polypropylene with ABS disc

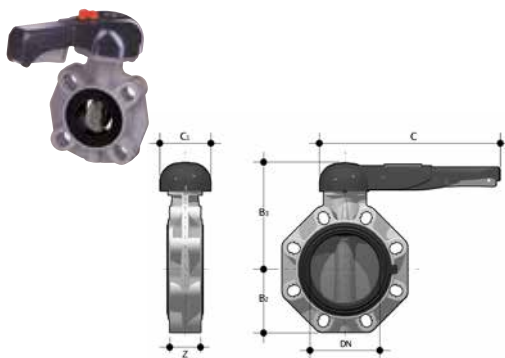

lever operated


d	DN	PN	B ₂	B ₃	C	C ₁	gms	U	Z	Code
50	40	16	60	137	175	100	900	4	33	HO FKA 106
63	50	16	70	143	175	100	1080	4	43	HO FKA 107
75	65	10	80	164	272	110	1470	4	46	HO FKA 108
90	80	10	93	178	272	110	1870	8	49	HO FKA 109
110	100	10	107	192	272	110	2220	8	56	HO FKA 110
140	125	10	120	212	330	110	3100	8	64	HO FKA 111
160	150	10	134	225	330	110	3850	8	70	HO FKA 112
225	200	10	161	272	420	122	6750	8	71	HO FKA 113

Options:

FPM seals order HO FKB***

U = No. of holes

with gear box



Size	DN	PN	B ₂	B ₅	B ₆	G	G ₁	G ₂	G ₃	gms	U	Z	Code
75	65	10	80	174	146	48	135	39	125	2400	4	46	HV FKA 108
90	80	10	93	188	160	48	135	39	125	2800	8	49	HV FKA 109
110	100	10	107	202	174	48	135	39	125	3150	8	56	HV FKA 110
140	125	10	120	222	194	48	144	39	200	4450	8	64	HV FKA 111
160	150	10	134	235	207	48	144	39	200	5200	8	70	HV FKA 112
225	200	10	161	287	256	65	204	60	200	9300	8	71	HV FKA 113
250	250	10	210	317	281	88	236	76	250	18600	12	114	HV FKA 114
315	300	8	245	374	338	88	236	76	250	25600	12	114	HV FKA 115

Options:

FPM seals order HV FKB***


U = No. of holes

Note: Lugged versions available to special order. Please refer to our Valve Department for further details.

Our valve range can be electrically or pneumatically actuated.
For further details see page 77, or contact our Valve Department on 01543 471681.

Accessories

Cobra pipe clips

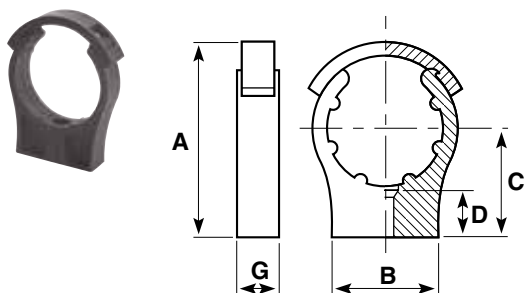

Size	A	B	C	D	G	Bolt/Screw	gms	Code
*12	–	24	25	15	16	M4/3BA/No 8	5	13 434 304
*16	–	35	25	17	16	M4/3BA/No 8	7	13 434 305
*20	–	35	30	14	16	M5/1BA/No 10	8	13 434 306
*25	–	35	35	16	17	M5/1BA/No 10	11	13 434 307
32	65	45	40	17	17	M5/1BA/No 10	14	13 434 308
40	75	45	45	20	20	M5/1BA/No 10	21	13 434 309
50	85	50	50	22	21	M6/0BA/No 10	30	13 434 310
63	102	60	60	19	21	M6/0BA/No 10	42	13 434 311
75	122	70	70	27	31	M8	94	13 434 312
90	148	80	90	39	31	M8	121	13 434 313
110	171	90	96	36	35	M8	184	13 434 314
125	204	144	132	40	40	M8	237	13 434 315
140	211	156	132	40	40	M8	252	13 434 316
160	243	170	150	40	40	M8	330	13 434 317

*Without retaining clips. Bolts/screws not supplied.

Rubber lined pipe clips



Size mm	Thread	Code
16	M10	FT PC 1600
20	M10	FT PC 2000
25	M10	FT PC 2500
32	M10	FT PC 3200
40	M10	FT PC 4000
50	M10	FT PC 5000
63	M10	FT PC 6300
75	M10	FT PC 7500
90	M10	FT PC 9000
110	M10	FT PC 1100
160	M10	FT PC 1601

One-step solvent cement



Litres	gms	Code
0.5	550	03 461 395
1.0	1100	03 461 396

Only Durapipe ABS solvent cement and Durapipe Eco-cleaner should be used for jointing of Durapipe ABS pipework systems.

Eco-cleaner



Litres	gms	Code
0.5	500	03 457 395

Only Durapipe ABS solvent cement and Durapipe Eco-cleaner should be used for jointing of Durapipe ABS pipework systems.

Chamfering and de-burring tools



Description	Product code
E 16-63mm pipe inner and outer milling cutter tool	FT 55 65 12
32-160mm chamfering tool	FT 55 05 10

Pipe cutters



Description	Product code
16-63mm pipe cutter	FT 80 00 01
50-125mm pipe cutter	FT 80 00 03
16-63mm spare cutter wheel	FT 80 00 02
50-125mm spare cutter wheel	FT 80 00 04

Fibreseal



Description	Product code
Sealing tape for threaded connections	03 469 395